



Liquidation Sale

Equipment no longer needed for continuing operations of Purolea Cosmetics



Production Filling Line for Sale

Equipment no longer needed for continuing operations at Purolea Cosmetics. All items available now and accepting offers. Contact Jamie at (248) 602-1980 for additional information or to schedule a viewing.



40" 304 STAINLESS STEEL TURNTABLE




3 STATION SCREW CAP TIGHTENER



40" 304 STAINLESS STEEL TURNTABLE



ECONOLINE WRAP LABELING SYSTEM

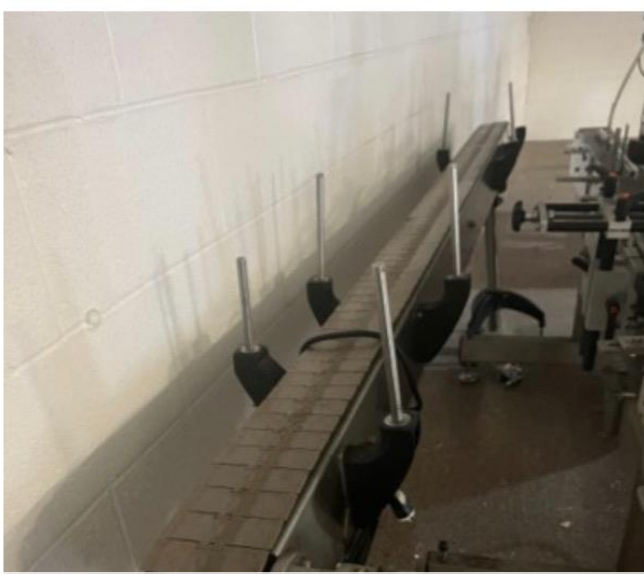

12.5 FT CONVEYOR, 2 AVAILABLE



6 HEAD AUTOMATIC GRAVITY FILLER



6 HEAD GRAVITY FILLER

Call Jamie at (248)602-1980 to schedule an inspection!



Liquidation Sale



Equipment no longer needed for continuing operations of Purolea Cosmetics

Production Filling Line for Sale

EQUIPMENT SPECIFICATIONS:

6 Head Automatic Gravity Filler

- 304 stainless steel heavy-duty frame construction
- 316 stainless steel 3/4" pneumatic actuated fill valves * Braided PVC tubing and fittings
- User-friendly Allen Bradley /Micrologix 1200 controls with color touch screen
- Automatic drip tray protects bottles from potential drips
- Automatic pin-style indexing to bring bottles in and out of fill station
- Photo sensor/counter system to ensure containers are in place prior to filling
- 115V/1f/50-60Hz, 80-100psi compressed clean dry air

6 Head Gravity Filler Model: EP2000A7 Serial No: 1016-42808-216-149

- GI-3300 Automatic Pressure filler
- Filling Nozzle (3/8", 1/2", 5/8", or 3/3")
- Pneumatic Drip Tray
- Foal with Ball Valve

EconoLine Wrap Labeling System * E100 Side Mounted Labeling Head

- 6 1/4" web width (6 1/8" max. label width)
- 12" label unwind capacity
- Dispensing speeds variable at up to 800"/ min - Heavy Duty Vert. & Horiz. Head support
- Setup memory for up to 50 product presets
- Intuitive operator panel with keyed access to system set-up screens
- Variable speed conveyor assembly - Stainless steel frame
- 4-1/2" wide x 120" (10 foot) long x 32" high on casters - Delrin chain conveyor

TruCap-4 Cap Tightener – ACASI

- Pneumatic Clutch Set
- 10Ft Conveyor

3 Station Screw Cap Tightener

- 304 stainless steel and anodized aluminum internal components
- Variable speed drive controls for spindle wheels and gripper belts
- Pneumatic clutch torque control for 2nd & 3rd spindle set, adjustable during operation
- All controls and adjustments located in face plate for ease of changeover
- Cap stabilizer assembly & poly foot to assist in starting caps

(2) Conveyors, 12.5' length each

- 304 stainless steel shell construction, 4.5" wide Delrin chain belt
- Standard line height range 32-38"
- Single 1" flat stainless steel rail system with HDPE wear

(2) 40" Turntables each with 304 stainless steel top